




X2

ANCLAJE

Product

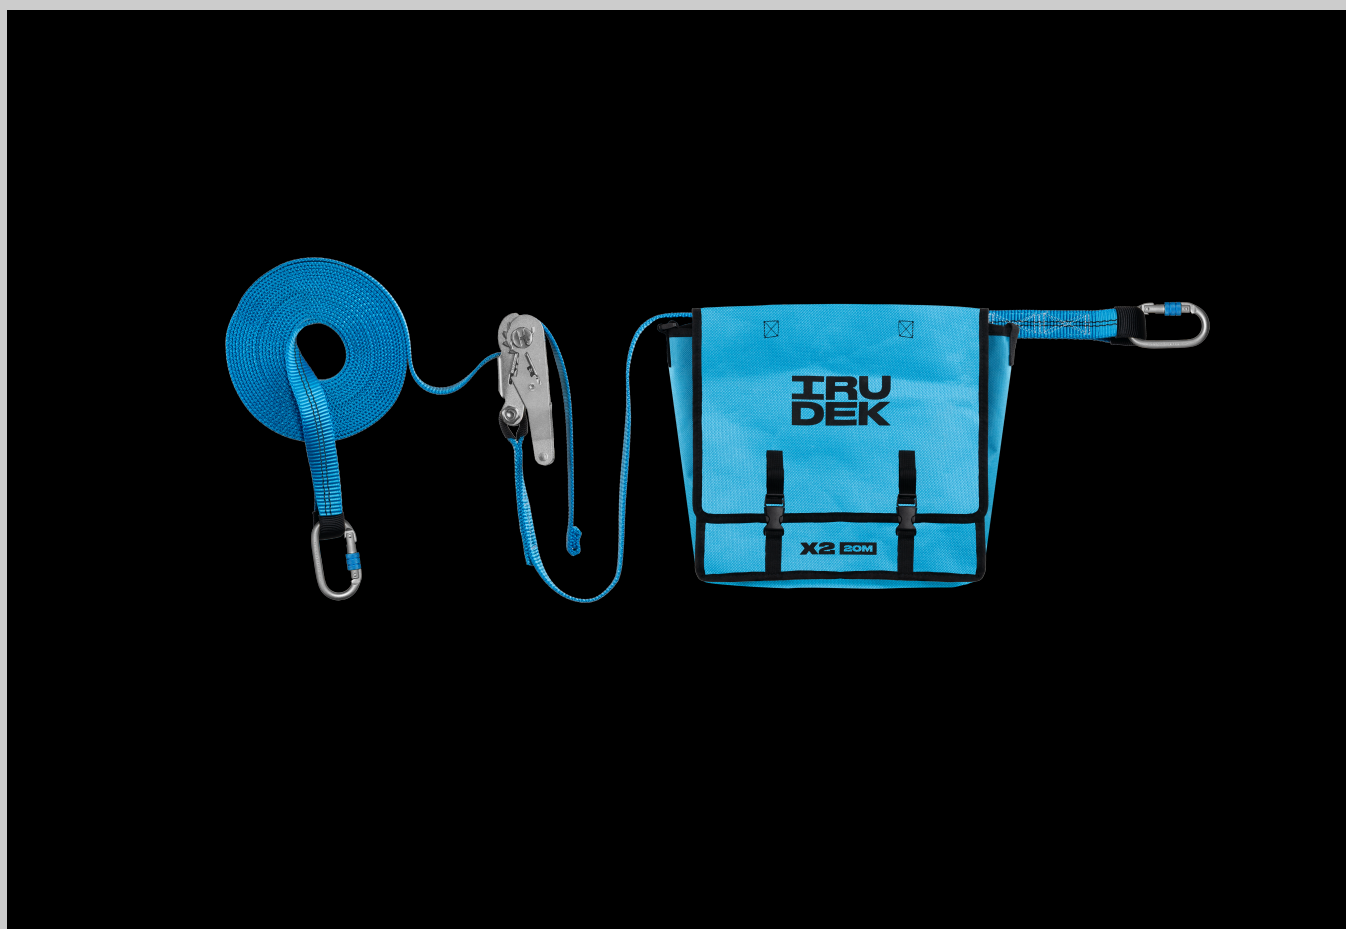

Description

- Temporary horizontal ribbon lifeline for 2 simultaneous users.
- Equipped with ratchet tensioner to tighten the line thanks to its rotary movement, with locking and unlocking mechanism.
- 2 connectors included.


CHARACTERISTICS

Technical characteristics	Norma	EN 795 B/C + CEN/TS16415		
	Maximum number of users	2		
	Length	10 m	20 m	30 m
	Weight	2,75 kg	3,16 kg	3,65 kg
	Shelf life	10 years of use + 2 years of storage		
MATERIALS	Tensor	Steel		
	String	Polyester		
	Connectors	Steel		


Deflection values (Arrow)	Length (m)	1 user (m)	2 users (m)
	5	1	1,5
	6	1,1	1,6
	7	1,3	1,7
	8	1,5	1,8
	9	1,6	2
	10	1,8	2,2
	11	2	2,4
	12	2,1	2,6
	13	2,3	2,8
	14	2,5	3,2
	15	2,7	3,4
	16	2,9	3,7
	17	3	3,9
	18	3,2	4,1
	19	3,4	4,3
	20	3,6	4,5
	21	3,0	3,8
	22	3,1	4,0
	23	3,3	4,2
	24	3,4	4,4
	25	3,6	4,6
	26	3,7	4,8
	27	3,9	4,9
	28	4,0	5,1
	29	4,1	5,3
	30	4,3	5,5

Certified types
of assembly


On fixed anchor

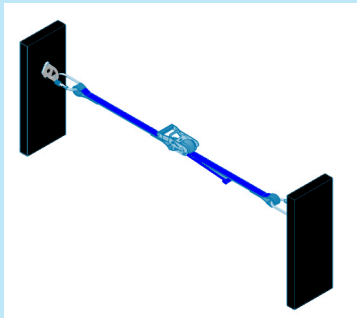

On temporary anchorage

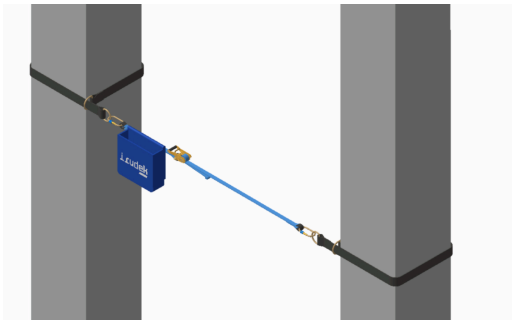

Clamped to structure at both
terminals

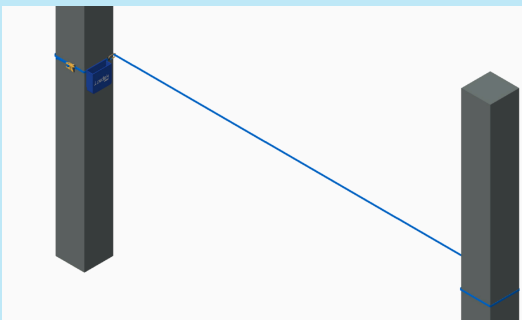

Hugging structure

